



VACUUM SEALER SU-806

Floorstanding unit. 63 m³/h. 530+848 mm.



SALES DESCRIPTION

Two sealing bars (530+848 mm.)
63 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

OPTIONAL

- Inert gas.
- Printer.
- Bluetooth connectivity.
- Vacuum packing bags.
- External vacuum kit for Vac-Norm, containers and accessories.
- Bag cutting kit.
- Support for liquid packaging.
- Additional filling plates.

ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kits
- Vac-norm containers
- Smooth bags for vacuum packing
- Thermal labels for CG2 / RB printer
- RB Desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 63 m³/h
Pump capacity (60 Hz): 75 m³/h
Bar length: 530 mm + 848 mm
Total loading: 1500 W
Vacuum pressure (maximum): 0.5 mbar

Plug: --
Electrical connection: --

Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

External dimensions (WxDxH)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm

Net weight: 232 Kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions

840 x 1060 x 1200 mm
Gross weight: 257 Kg

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

product sheet
updated 04/03/2022



SAMMIC, S.L.
Bassaré, 1 - 20720 Azzovita
www.sammic.com



VACUUM SEALER SU-806


Floorstanding unit. 63 m³/h. 530+848 mm.



AVAILABLE MODELS

- 1140881 Vacuum packing machine SU-806 230-400/50/3N
- 1140882 Vacuum packing machine SU-806 230-400/50/3N -C-
- 1140883 Vacuum packing machine SU-806G 230-400/50/3N
- 1140884 Vacuum packing machine SU-806P 230-400/50/3N
- 1140885 Vacuum packing machine SU-806GP 230-400/50/3N
- 1140899 Vacuum packing machine SU-806 208-240/60/3
- 1140900 Vacuum packing machine SU-806 208-240/60/3 -C-
- 1140901 Vacuum packing machine SU-806G 208-240/60/3
- 1140902 Vacuum packing machine SU-806P 208-240/60/3
- 1140903 Vacuum packing machine SU-806GP 208-240/60/3
- 1140917 Vacuum packing machine SU-806 220/60/3
- 1140918 Vacuum packing machine SU-806 220/60/3 -C-
- 1140919 Vacuum packing machine SU-806G 220/60/3
- 1140920 Vacuum packing machine SU-806P 220/60/3
- 1140921 Vacuum packing machine SU-806GP 220/60/3
- 1140922 Vacuum packing machine SU-806GP 220/60/3

* Ask for special versions availability

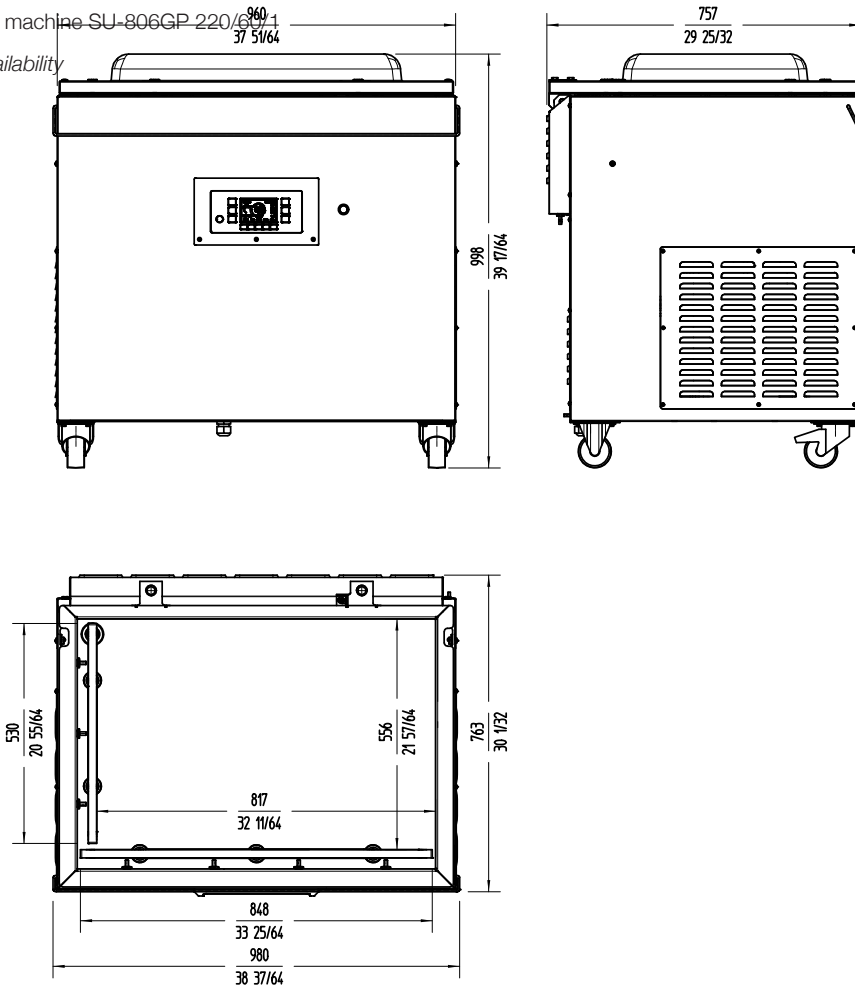

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 04/03/2022