

# NW458



- NW308
- NW458
- NW508
- NW608
- NW1008

## NW Series Modular Cube Ice Maker



Vertical Cube System




T304 Stainless Steel Panels



Proximity Condenser Air Filter



Auto-alert Indicator Lights



Air and Water Cooled  
Condenser Options



Double Stack  
(Needs a stacking kit sold separately)

### 24 Hour Volume Production

Air Cooled			Water Cooled		
70°F/21°C 50°F/10°C lb/kg	Air Water	AHRI 90°F/32°C 70°F/21°C lb/kg	70°F/21°C 50°F/10°C lb/kg	Air Water	AHRI 90°F/32°C 70°F/21°C lb/kg
452/200		322/146	434/197		364/165

### Cube Ice



Full Cube - 12g (26.5 x 26.5 x 26 mm)    Half Cube - 6g (13 x 26.5 x 26 mm)

### Modular Bin Options



Storage Capacity: 178 kg




Storage Capacity: 243 kg



Storage Capacity: 406 kg



# Dimension

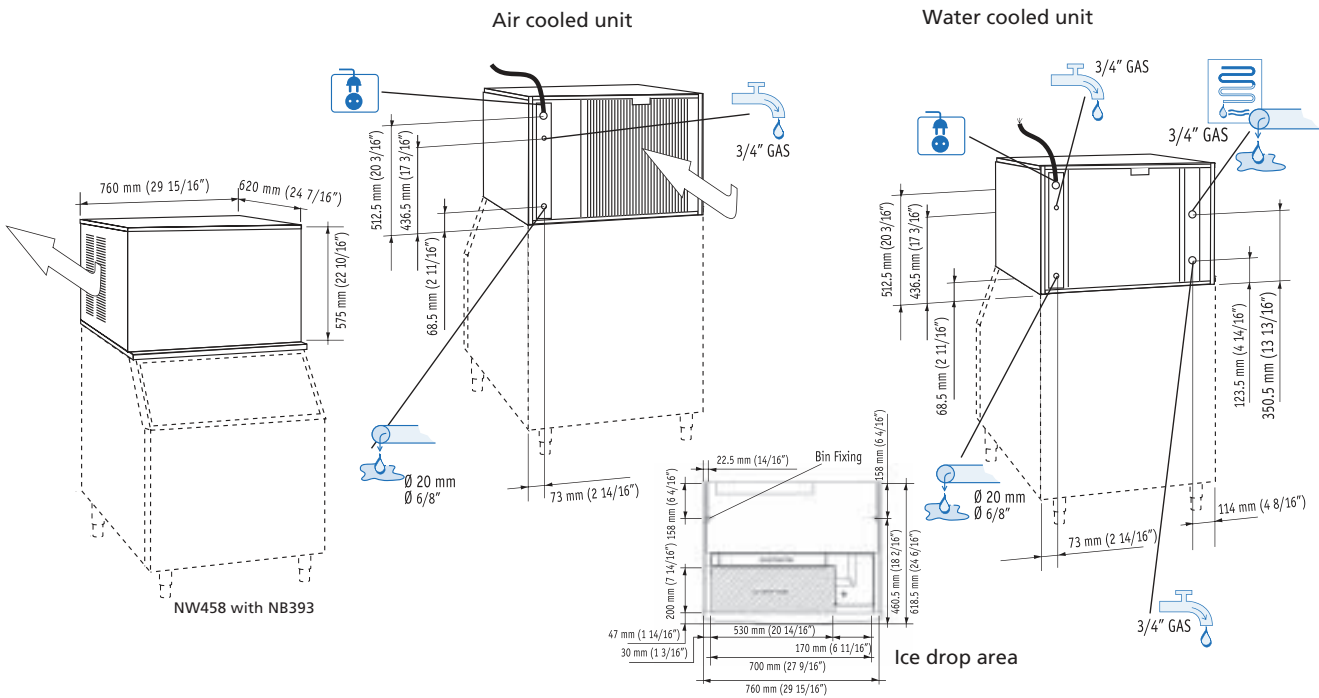

# Specifications

		[Btu/h] [W]	[Ømm <sup>2</sup> ]	[V/Hz/Ph]	[W]	FUSE	[kwh/100kg]	[L/100kg]	[kg] [lb]	[kg] [lb]	[kg] [lb]	[kg] [lb]	
<b>NW458 AS</b>		8900 2600	3x1.5	<b>230/50/1</b>	1000	16 A	<b>14,3</b>	<b>128</b>	70 154	85 187			
<b>NW458 WS</b>		8900 2600	3x1.5	<b>230/50/1</b>	900	16 A	<b>12,8</b>	<b>1819</b>	69 152	84 185			
<b>NWH458 AS</b>		8900 2600	3x1.5	<b>230/50/1</b>	1000	16 A	<b>14,3</b>	<b>128</b>	70 154	85 187			
<b>NWH458WS</b>		8900 2600	3x1.5	<b>230/50/1</b>	900	16 A	<b>12,8</b>	<b>1819</b>	69 152	84 185			

# Performance Table

		NW458 AS NWH458 AS					NW458 WS NWH458 WS								
		50°	60°	70°	90°	50°	60°	70°	90°	50°	60°	70°	90°		
°C	°F	10°	15°	21°	32°	10°	15°	21°	32°	10°	15°	21°	32°		
10°	215	207	195	175	kg	200	197	187	167	kg	440	434	412	368	lb
50°	475	456	430	386	kg	197	192	182	163	kg	434	423	401	360	lb
21°	200	195	186	165	kg	187	182	175	163	kg	386	364	337	lb	
70°	452	440	410	364	kg	175	165	153	137	kg	364	350	322	291	lb
32°	152	148	146	132	kg	165	159	146	132	kg	350	322	291	lb	
90°	335	326	322	291	kg	159	146	132	118	kg	322	291	260	lb	
38°	132	128	125	118	kg	146	132	118	104	kg	291	260	230	lb	
100	291	282	276	260	kg	132	118	104	90	kg	260	230	200	lb	

# Operating Range

Minimum	Maximum
10°C (50°F)	40°C (103°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

**IMPORTANT NOTICE:**  
 Models and specifications are subject to change without notice.  
 This spec sheet is meant for commercial purpose only.  
 For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-china.com](http://www.scotsman-china.com)

**Scotsman**  
 Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg